




HIGH END

SINEWAVE UPS!

OUTPUT POWER 100W - 600W



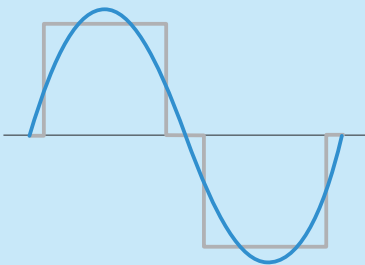

**PURE
SINEWAVE**



— Pure Sinewave
— Modified Sinewave

SineUPS is the professional emergency power solution, eliminating all problems from unexpected power cuts.

The pure sinewave unlike the modified sinewave, has the same form as the mains voltage, thus guarantying smooth and effective work of the loads connected.

-  Circulation pumps
-  Gas and pellet boilers
-  Solar systems
-  Security systems

TECHNOGAMMA Ltd.

+359 32 699 240

+359 878 840 524

+359 899 812 641

sales@technogamma.bg

www.technogamma.bg



	PARAMETER	S100a	S100a+	S100	S200	S400	S600	
INPUT	Voltage	230 VAC						
	Frequency	50 Hz						
	Voltage to switch to battery powered mode	below 180 VAC over 260 VAC						
	Protection	Fuse, mounted on the housing						
OUTPUT	Voltage	230 VAC ± 4%						
	Frequency	50 Hz ± 1 Hz						
	Power	100 W	100 W	100 W	200 W	400 W	600 W	
	Voltage form	Pure Sinewave						
	Switching time	< 5ms						
	Protection	Automatic resettable protection from overload and short circuit						
BATTERY	Type	12V, lead-acid						
	Capacity	Internal 7.2 Ah	Internal 7.2 Ah External 20-70 Ah	External 20-70 Ah	External 20-100 Ah	External 20-150 Ah	External 40-250 Ah	
	Protection	–	Reverse polarity connection protection					
	Weight	5.0 kg	5.0 kg	2.1 kg	3.0 kg	5.5 kg	6.0 kg	
	Dimensions	200 x 200 x 70 mm				255 x 215 x 130 mm		
	Ambient temperature	0 – 35 °C						
	Relative humidity	0 – 95 %						